

Modular design that can accommodate a wide range of wattages for street and area lighting applications. EncapLED module with patent pending heat sink and optic design achieves high efficacy and precise light distribution. Ideal for warehouse, assembly areas, gymnasiums and dock areas.



Feature Highlight

- Philips Rebel chips
- Up to 115 lm/W efficacy at 5000K
- Patent-pending EncapLED module for superior cooling and durability
- Wide range of wattage selections from 60W to 300W
- Light weight aluminum housing
- CETL/CUL, ROHS, IP65 rated and DLC
- Five year warranty



Optical Specification


- Color temperature from 2700K to 6000K, CRI 70
- Vw:150 degree
- Vm:120 degree
- Vn: 40 degree

Electrical Specification

- Power input: 120-277V, 347 or 480V optional
- Power factor >90 - UL listed driver
- Optional for 0-100% dimming, motion sensor and smart control

Mechanical Specification

- Adaptor options for installations
- Finishes: Bronze, Black, Silver, White

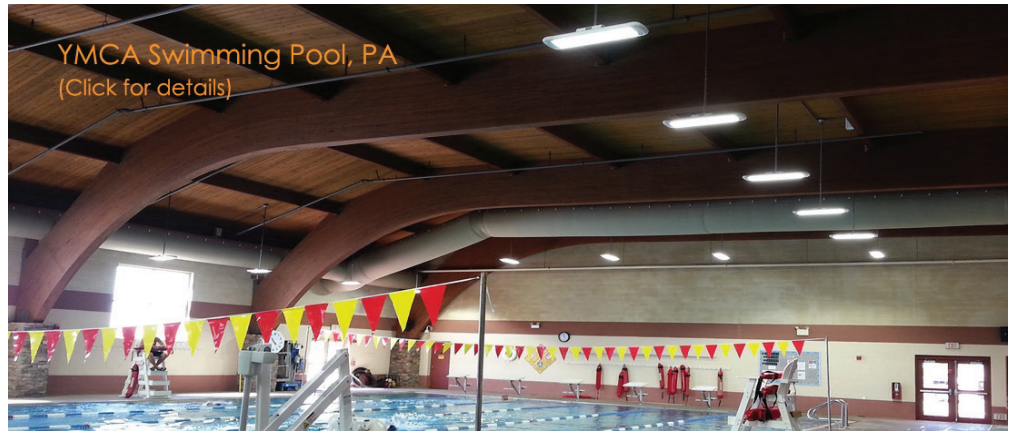

Model #	No. of LEDs	Lumens at 5000K @700mA	Replacement	Model #	No. of LEDs	Lumens at 5000K @700mA	Replacement
DL-S-60W	30	6450	175MH	DL-S-150W	70	15050	
DL-S-70W	35	7525		DL-S-160W	80	17200	
DL-S-80W	40	8600		DL-S-180W	90	19350	
DL-S-90W	45	9675	250MH	DL-S-200W	100	21500	
DL-S-100W	50	10750	300MH	DL-S-220W	110	23650	
DL-S-110W	55	11825		DL-S-240W	120	25800	1000MH
DL-S-120W	60	12900	400MH	DL-S-280W	130	27950	
DL-S-130W	65	13975		DL-S-300W	140	30100	

Order Information

Model #	Mounting	Color Temperature	Lens Type	Finish	Accessories	Voltage
DL-B Wattage (60W-300W)	Slipfitter (SF) Pendent (P) Wall (W)	5000K 4000K 3500K (Special Order) 3000K (Special Order)	Vw, VM, Vn III	Bronze (BR) Black (BL) Silver (SL) White (WH)	None (N) Dimmable (D) Smart System (SS)	120-277V 347V 480V

Order Example: DL-B-120W-P-5000-Vm-BR-N-277V